



KIT B 500

SERIES 24V D.C.

24V ELECTROMECHANICAL BARRIER FOR BEAMS UP TO 6 M

- 24V barrier for beams up to 6m and 4-6 sec opening time.
- 24V motor with 110V or 220V input.
- Painted casing.
- Control unit USER 1 24V DG with display

24V BARRERA ELECTROMECÁNICA PARA ASTAS HASTA 6 M

- 24V barrera para astas hasta 6m y 4-6 sec tiempo de apertura.
- Versiones a 220V o 110V.
- Bajo pedido modelo en alta tensión.
- Caja pintada.
- Central de mando USER 1 24V DG.


TECHNICAL SPECIFICATIONS CARACTERÍSTICAS TÉCNICAS

Motor power: 24V DC
Alimentación:

Opening time: 4-6 sec.(up to 6m)
Tiempo de apertura: 4-6 sec.(hasta 6m)

Max beam length: up to 6m
Longitud máx asta: hasta 6m


Operating Temperature: -20°C
Temperatura de trabajo: +55°C

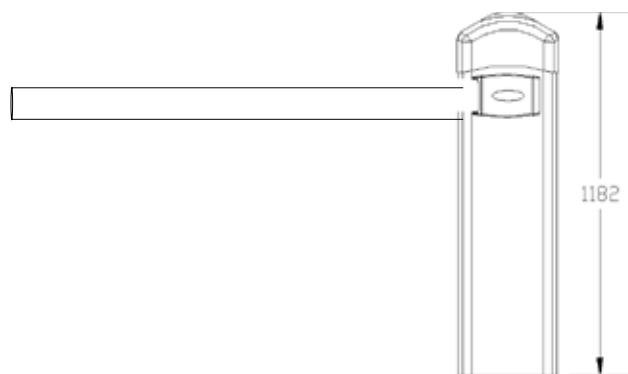

Dimensions mm




Release for round beams
*Desbloqueo para
hasta redonda*




Manual release with lock
*Desbloqueo manual
con cerradura*



Internal photo



RIGHT



LEFT





24V ELECTROMECHANICAL BARRIER

B 500 BL 24V-115V	Code	Name	Motor Input Voltage	Description
	11320505L-I	B 500 BL 24V	24VDC- 115VAC	24V BARRIER LEFT for beam up to max 6 m 4-6 sec. opening time
B 500 BR 24V-115V	Code	Name	Motor Input Voltage	Description
	11320505R-I	B 500 BR 24V	24VDC- 115VAC	24V BARRIER RIGHT for beam up to max 6 m 4-6 sec. opening time










24V ELECTROMECHANICAL BARRIER

B 500 BL 24V-230V	Code	Name	Motor Input Voltage	Description
	11320506L-I	B 500 BL 24V	24VDC- 230VAC	24V BARRIER LEFT for beams up to max 6 m 4-6 sec. opening time
B 500 BR 24V-230V	Code	Name	Motor Input Voltage	Description
	11320506R-I	B 500 BR 24V	24VDC- 230VAC	24V BARRIER RIGHT for beams up to max 6 m 4-6 sec. opening time

Spring type (mm)	
Ø 4	
Ø 5	
Ø 6	

BEAMS AND SPRING COMBINATIONS

BEAMS	Code	Description
	11902065- I	BOLD - 4M KIT round beam 4,0 m + n.1 spring Ø 5 mm + n.1 spring Ø 4 mm
	11902070- I	BOLD - 5M KIT round beam 5,0 m + n.1 spring Ø 6 mm
	11902075- I	BOLD - 6M KIT round beam 6,0 m + n.1 spring Ø 5 mm + n.1 spring Ø 6 mm

Beam model		
		
		
		



10920805-I
Fixed support
for beam BOLD



12710691
Flashing lamp
with led

